

FIG. 1

36—

<i>5</i> 0 –							
		5 0 .	<i>52</i> 7	74 54 76 	<i>56 78</i>	5 8	<i>60</i> 80
	Table	Actor	Steps			$\top T$	
62—	login	ACTOR	SETUP	TF /	FETF	PB	VMESSAGE
64—	Test the login dialog		From	User Name	Password	Login	Message Text
66 	Login with a valid username and password. < < HIGH >	user <u>51</u>	Login window	dallin	mypassword	OK	Welcome! Your Login Was Successful.
68-	Login with variations of an invalid				MYPASSWORD; MyPassword; notmypassword		Your User Name and Password
77—	password. - < MEDIUM >						Do Not Match. Please Try Again.
70-	Login with blank password.	<u>53</u>			<tfblank> <u>55</u></tfblank>		Your Password Is Required. Please Enter A Valid Password.
72-	Login with blank username.			<tfblank></tfblank>	mypassword		Your User Name Is Required. Please Enter A Valid User Name.
73-	Test the Cancel Button			NULL	NULL	Cancel	< VWINCLOSES > Login
	61	63	65	67A	∱ 67B	67C	67D 59

FIG. 2

The first than the first the first the first than the first than that the first than

32-

Tag: ACTOR Description: Generic line for the actor < cell contents > = The actor for this test.	-	00
Text: The actor for this test is <cell_contents>. Code: End Code.</cell_contents>		90
Tag: SETUP		
Description: Setup step for standard (appstate-based) applications <actor> = The actor for this test. Should be in the actor column of the table.</actor>		92
Text: Navigate a <actor> to the <cell_contents>. Code: End Code.</cell_contents></actor>		<i>-</i>
Tag: TF		
Description: Enter text into a text field, also known as edit field or edit control.		
<pre><cell_contents>=The text to enter into the text field. <object name="">=The name of the text field.</object></cell_contents></pre>		94
Text: Enter '< cell_contents>' into the < object_name> text field . Code:		
End Code.		
Tag: PB		
Description: Clicking a push button. < cell contents > = The name of the push button.		
Text: Click the <cell contents=""> push button.</cell>		96
Code:		
End Code.	- - - -	
Tag: VMESSAGE Description: Verify a message or static text. Can be used to test messages appearing in message	hoved	
or on other windows in the application.		ഹ
<pre><cell contents="">=The expected message.</cell></pre>		98
Text: Verify a ' <cell_contents>' message appears. Code:</cell_contents>		
End Code.		
Tag: TFBLANK		
Description: Blanks a text field (removes all text in it).		
<pre><object_name> = The name of the text field. Text: Delete all of the text in the < object_name> field.</object_name></pre>		<i>100</i>
Code:		
End Code.		
Tag: VWINCLOSES		
Description: Verify a window closes. < cell contents > = The window expected to close.		
Text: Verify the < cell contents > window closes.		<i>101</i>
Code:		
End Code.		

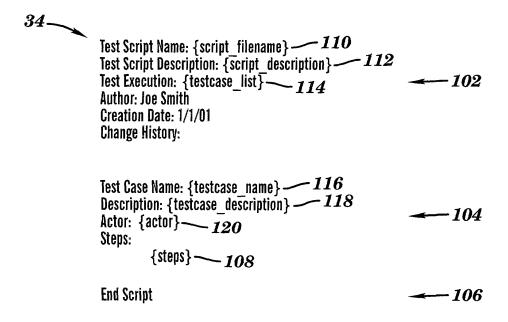


FIG. 4

10

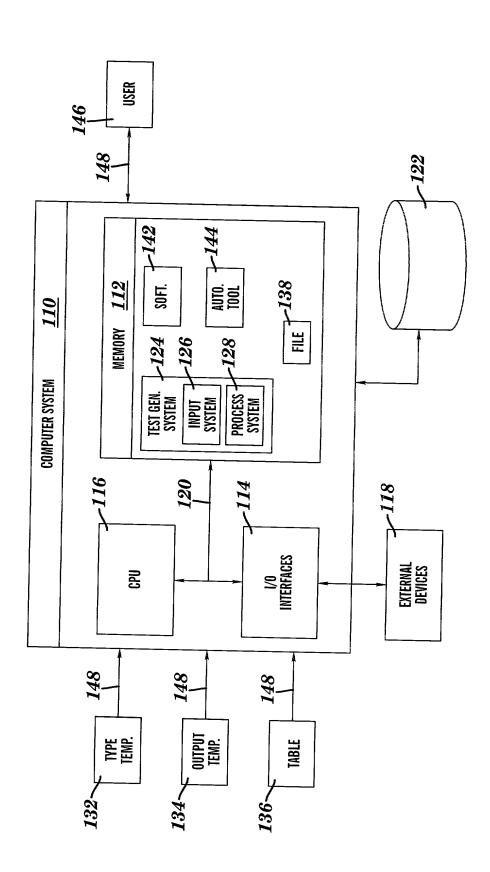


FIG. 5